




## **ASSEMBLY INSTRUCTIONS FOR 31741-16**

**FIG. 1**

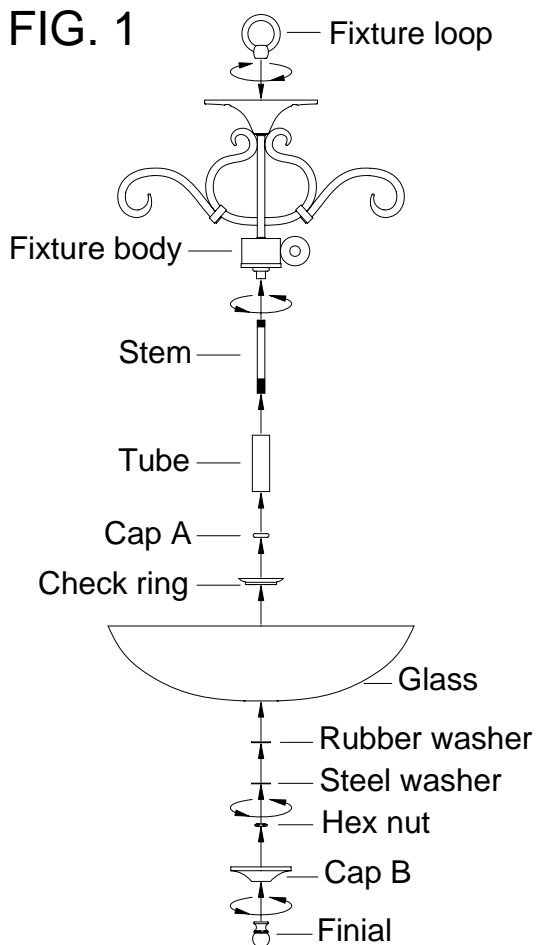

### **FOR CHAIN-HUNG MOUNTING: (REFER TO FIG.1)**


1. Before beginning the assembly, carefully unpack and identify all parts referring to the illustration.
2. Unravel the supply power and ground wires and pass the holes of fixture loop. Thread the fixture loop onto the coupling at the top of fixture body. Hand tightens until snug.
3. Thread the top of stem into the coupling at the underside of fixture body. Hand tightens until snug.
4. Install proper bulbs (not provided) to the sockets referring to the markings and labels on fixture for maximum wattage.
5. Locate the tube, cap A, check ring, glass, rubber washer and steel washer. Carefully pass the center holes of tube, cap, glass, rubber washer and steel washer through the stem and secure with hex nut.
6. Install cap B through the protruding stem and secure with finial.
7. Restore power to the installation point ON. Retain this sheet for future reference.





## **ASSEMBLY INSTRUCTIONS FOR 31741-16**

**FIG. 2** Crossbar with screws

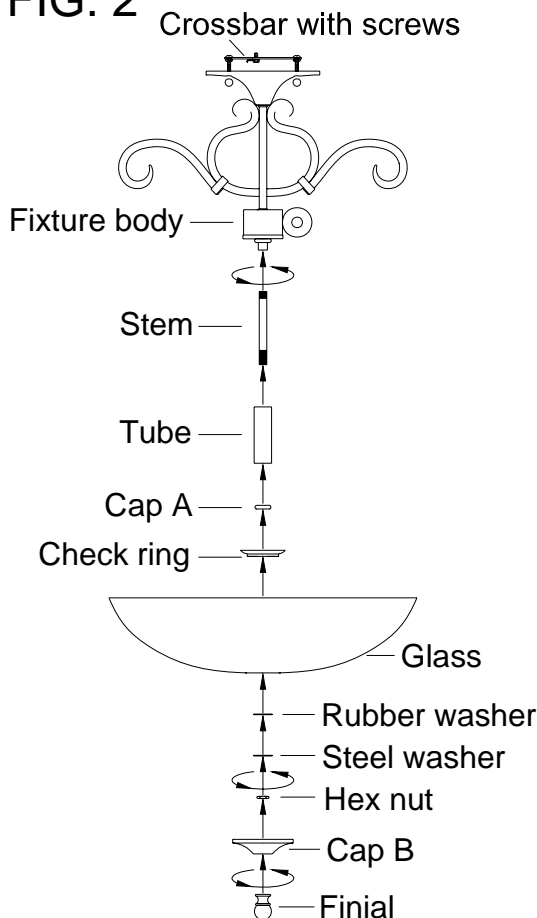

### **FOR CEILING MOUNTING: (REFER TO FIG.2)**

1. With power to the installation point OFF, attach the crossbar with (2) mounting screws to ceiling mounted outlet box with (2) outlet box screws.
2. Unravel the fixture supply and ground wires using wire cutters, trim the fixture supply and ground wires to approx. 6 inches in length from where wires exit top of fixture. Trim back wire jacket approx. 3/4 inches.
3. Remove the fixture loop from the fixture body (Refer to FIG. 1).
4. Make wires connection: (We recommend 2 people for this step) Position the fixture canopy under the outlet box. Attach house ground wire to fixture ground wire. Proceed to attach both to the crossbar using ground screw. Using wire connectors connect the house white wire to the fixture supply wire (ribbed side); connect the house black (or red) wire to the fixture supply wire (smooth side).
5. With the connections properly made, align and pass the (2) mounting screws attached to crossbar through (2) mounting holes in the fixture canopy on the top assembly. Locate (2) ball nuts and thread onto ends of mounting screws. Hand tightens until snug to secure fixture to ceiling. Be sure there are no trapped or pinched wires.
6. Restore power to the installation point ON. Retain this sheet for future reference.